

# Fluid Cooling Mobile AOHM & AOVHM Series

## Features

- AO/AOVH Series with Hydraulic Motor
- Adjustable Louvers
- High Heat Removal
- Heavy Duty Construction
- Wide Flow Range
  - Heat Removal up to 210,000 BTU/Hr.
  - Long Life Hydraulic Motor
  - NPT Connections



## OPTIONS

- Built-in Relief Bypass Valve
- SAE or BSPP Connections
- Corrosion Resistant Coating


## Ratings

- Operating Pressure** 300 psi
- Test Pressure** 300 psi
- Operating Temperature** 400° F

## Materials

- Tubes** Copper
- Fins** Aluminum
- Turbulators** Steel
- Manifolds** Steel
- Connections** Steel
- Cabinet** Steel with Baked Enamel Finish
- Fan Blade** Aluminum with Steel Hub
- Fan Guard** Zinc Plated Steel
- Fan Adapter** Steel

## How to Order

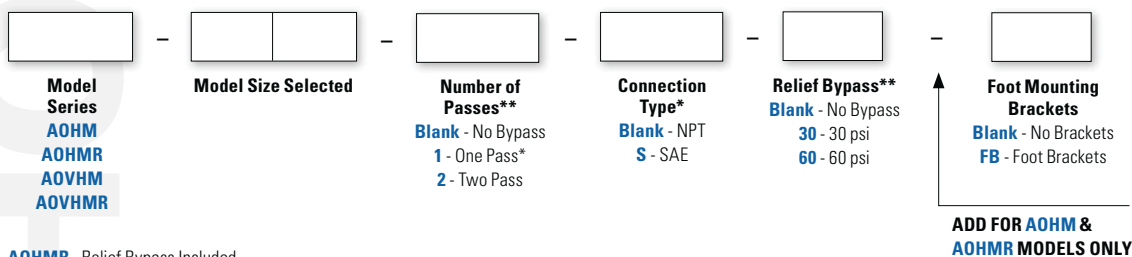

AOHMR - Relief Bypass Included

AOVHMR - Relief Bypass Included (available in 2 pass only)

\*Other connection types available. Please consult factory for assistance.

\*\*ADD FOR AOHMR & AOVHMR MODELS ONLY